

Accredited Builders Company (ABC)

اكریڈیٲڈ بلڈرز كمپنی



Quotation for Public Toilet at Education Faculty

The girls' toilet block which has 29.25 m² area includes 4 toilets according to drawings and BoQ.

ABC offers their agreement upon the estimation calculated in BoQ attached with this letter of agreement, The toilet block construction work will take approximately 60 working days.


We are committed to construct and build with all designed and required codes and standards.

The estimated cost for the construction of specified toilet block is **\$ 7,805.96.**



Address: Jalalabad, Nangarhar – Afghanistan

Diagrammtitel

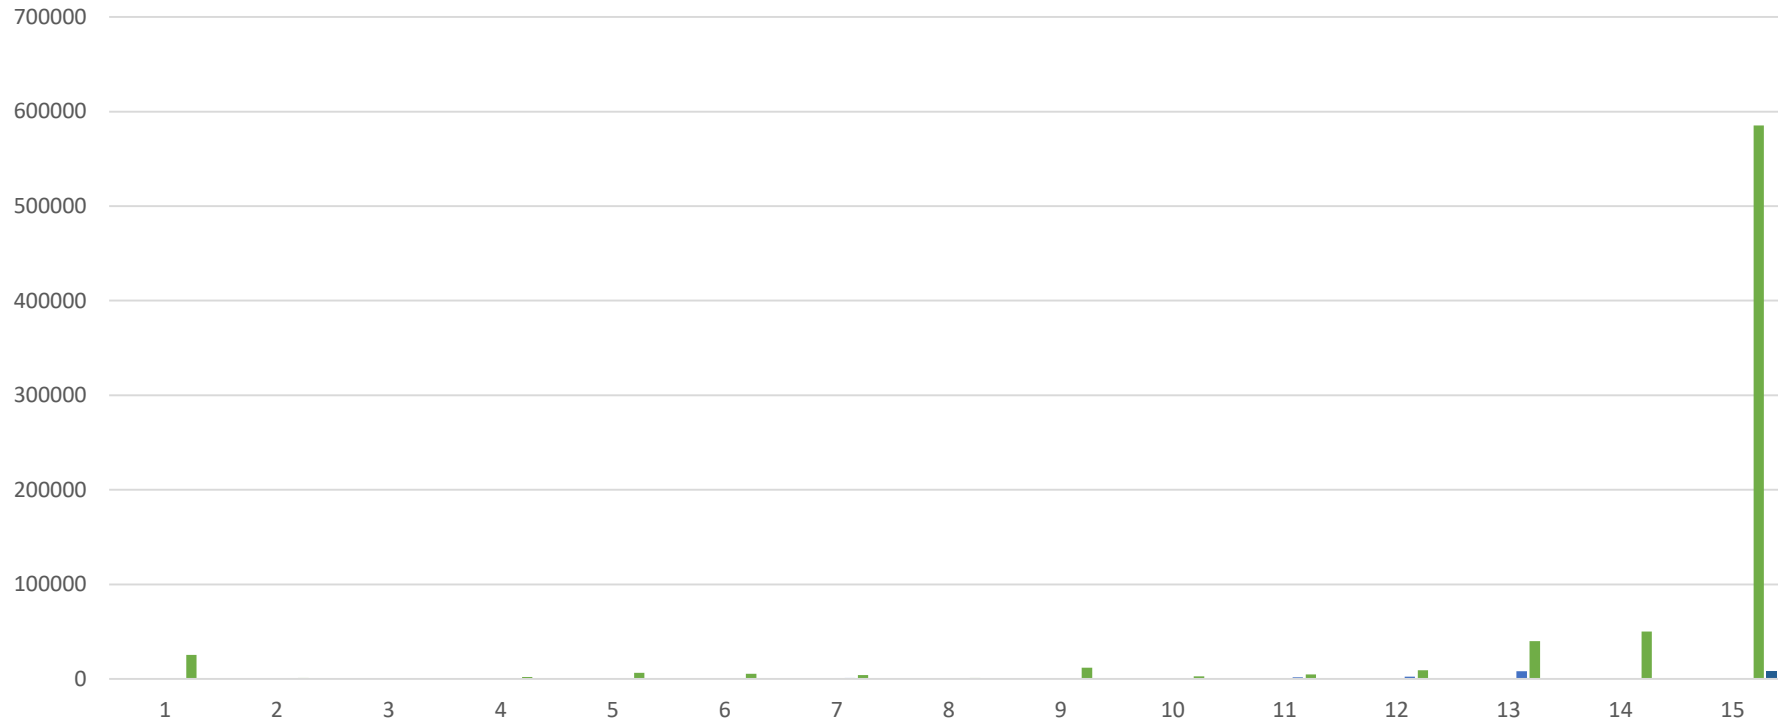

■ No 1 2 3 4 5 6 7 8 9 10

■ Description of Activity Excavation Compacted soil for backfilling Boulder stone Stone Masonry Brick Masonry Total PCC Total RCC of Column, beam, ring beam, slab and footing Plaster Tile for wall Ceramic for floor

■ Unit m3 m3 m3 m3 m3 m3 m3 m2 m2 m2

■ Quantity 5.84 9.6 3.6 10.08 17.7 7.4 11.2 189 54.3 24

■ Unit Price/AFN 444 378 3340 4570 5800 16500 180 410 420

■ Total Cost/AFN 7000 4262.4 1360.8 33667.2 80889 42920 184800 34020 22263 10080

■ Remarks Tile size(30x60)cm Ceramic size(50x50)cm

Education Faculty

Toilet Block for the Girls

No	Description of Activity	Unit	Quantity	Unit Price/AFN	Total Cost/AFN	Remarks		
1	Excavation	m3	5.84		7000			
2	Compacted soil for backfilling	m3	9.6	444	4262.4			
3	Boulder stone	m3	3.6	378	1360.8			
4	Stone Masonry	m3	10.08	3340	33667.2			
5	Brick Masonry	m3	17.7	4570	80889			
6	Total PCC	m3	7.4	5800	42920			
7	Total RCC of Column, beam, ring beam, slab and footing	m3	11.2	16500	184800			
8	Plaster	m2	189	180	34020			
9	Tile for wall	m2	54.3	410	22263	Tile size(30x60)cm		
10	Ceramic for floor	m2	24	420	10080	Ceramic size(50x50)cm		
11	Bond for tiles and ceramic	bag	300	85	25500			
12	Filling for tile joints	box	20	55	1100			
13	cloth (malmal) for cleaning	pcs	4	80	320			
14	labor cost for tiles and ceramic	m2	15.92	130	2069.6			
15	Total paint work (2 coats)	m2	136	23.13	6291.36			
16	Labor cost for paint	m2	136	39	5304			
17	Eastern Comode	No	4	1000	4000			
18	Siphon	No	5	200	1000			
19	Electricity wiring with labor cost	Lum Sum			12000			
20	Muslim Shower	No	4	700	2800			
21	Wash basin	No	3	1600	4800			
22	Labor cost for plumbing and sanitary fittings	Lum Sum	4	2250	9000			
23	Door (wooden)	No	5	8000	40000			
24	Miscellaneous (Site cleaning, mobilization, demobilization, spouts and etc)				50000			
					AFN	585,447.36	\$	7,805.96